

Logitech Alert™ 750e Outdoor Master System

The complete video security system
you can set up yourself



Feel more secure, even when you aren't around.

Logitech Alert 750e Outdoor Master System is a complete outdoor security system in a box. It comes with everything you need to help protect what's important to you—a smart weatherproof, night vision camera, powerful PC software, the ability to keep you informed, and a free remote viewing account.

Set up is simple and takes just minutes. HomePlug® networking uses your existing electrical wiring and outlets to connect the camera to your network without new wires or configuration hassles.

There's no charge to view live video from your system from Internet-connected computers. And should someone or something move in front of a camera, video is recorded directly to the camera's microSD® card, and you'll receive an alert to your e-mail address and mobile phone.

Set it up yourself, count on it when you need it.

Visit Logitech.com/Security for more information and availability.

System Highlights

- Watch and listen to live camera footage
- Watch and listen to recorded video
- Focus in on what's happening using digital pan-tilt-zoom
- Set alerts to be sent automatically to one or more e-mail addresses
- Expand your system up to six cameras
- PC free recording

Camera highlights


- Night vision
- Weatherproof
- HD video recording
- Records audio
- Motion detection zones & motion-triggered alerts
- Free live viewing from Internet-connected PCs & mobile phones
- microSD™ card stores video, even when the PC is off





IP55 weather rating

Simple Setup


- ① Install Alert Commander Software



- ② Connect network adapter to router and connect power supply to camera

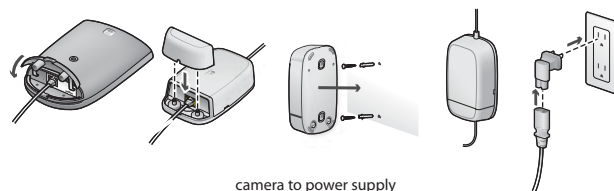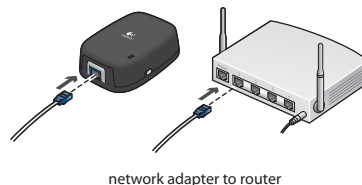

- ③ Mount the camera from a wall, ceiling, post, or eave

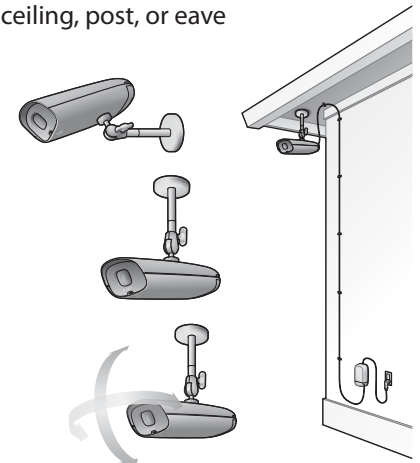

Subscriptions


Logitech Alert™ Web Commander

Web Commander turns any Internet-connected computer into a control center for your system. Your paid subscription lets you manage your cameras, review your recorded video, and get notices of system status. Comes bundled with Mobile Commander. Visit <http://alert.logitech.com> for subscription and availability information. Free trial available.



Logitech Alert™ Mobile Commander

When you can't be at a computer, you can check on your system from iPhone, BlackBerry, or Android phones using Mobile Commander. Your paid subscription lets you manage your cameras, review your recorded video, and get notices of system status. Comes bundled with Web Commander. Visit <http://alert.logitech.com> for subscription and availability information. Free trial available.

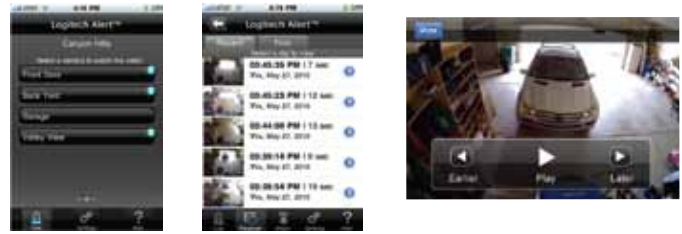

Mix and match Alert and Outdoor Cameras

No need to limit your security coverage to a single camera. Your Logitech Alert system is designed to be easily expandable. You can mix and match up to six cameras—indoors and out.




Alert 700i Add-On



Alert Outdoor 700e Add-On

What's in the box

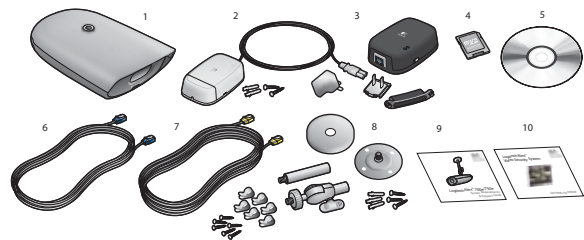

- | | | |
|----------------------------------|-------------------------------------------------|------------------------------|
| 1) Logitech Alert Outdoor Camera | 5) Software Install CD | 8) Wall/ceiling mount |
| 2) Camera power supply | 6) Network adapter cable (blue tips) 10-ft (3m) | 9) System Requirements Guide |
| 3) Network adapter | 7) Power supply cable (yellow tips) 20-ft (6m) | 10) Getting to Know Guide |
| 4) microSD™ card adapter | | |

System requirements

CPU Speed:	2 GHz
Memory (GB):	1
Display Resolution:	1024 x 720 or higher
Hard Drive (MB):	100 MB for software and minimum of 2GB/camera for video storage
Operating System:	Microsoft® Windows® Vista™, XP Home Edition, XP Pro, or XP Media Center Edition (SP3), Windows® 7
Web Viewer / Commander	Flash® Player (free download)

Camera features

Processing Power:	367 MHz DSP
Onboard Image Encoding:	H.264, MJPEG
Onboard Image Processing:	Motion detection up to 16 zones, Auto brightness
Sensor Resolution:	1600 x 1200
Viewable Resolution:	960 x 720, depending on your settings
Frame Rate:	15 frames/second
Bit Rate:	Compressor dependant
Color Depth:	8 bits

Lens

Focus:	Preset
Viewing angle:	132° (diagonal)
Illumination:	2 lx minimum per IEC 61146-1
Firmware updates:	Manual
Communications:	(to power supply) Ethernet; TCP/IP
Pan angle:	Software selectable

Operating environment

The Outdoor camera 700e meets IP55 weather rating requirements. It is weatherproof and perfect for all-weather applications, able to withstand water and temperature extremes.

Temperature Range

Operating:	-22°F to +122°F (-30° C to +50°C)
Storage:	-22°F to +140°F (-30° C to +60°C)
Humidity (storage and operating):	5% to 90% (relative; non-condensing)

Power Supply to camera cabling

Included cable:	CAT-5e, RJ-45 connectors, 10 feet (3 m)
User provided requirements:	CAT-5e or better, RJ-45 connectors, up to 100 feet (30 m)
Connector pin out:	Per IEEE 802.3
Property Size:	Up to 8,000 square feet

Physical metrics

Power consumption:	7 watts
Voltage:	82-265 Volts AC, 45 to 66 Hz

Camera body dimensions

Height:	Height: (4.61 cm); Width (9.4 cm); Depth: (16.1 cm)
Weight:	1.2 lbs (531 g)

Power supply dimensions

Height:	Height: (5.3 cm); Width: (8.2 cm); Length: (16.1 cm)
Weight:	9.87 oz (280 g)

Box dimensions

230mm (w) x 254mm (h) x 96mm (depth)